


Local, Caution Spotlight Fittings BAYD85 Series Explosion-proof Emergency Exit Light Fittings




- ◆ Explosion protection to
 - CENELEC
 - IEC
 - NEC
- ◆ Can be used in
 - Zone 1 and Zone 2
 - Zone 21 and Zone 22
 - Class I, Zone 1 and Zone 2
 - Class I, Division 1, Groups C, D
- ◆ Lighting both in normal condition and emergency condition; When power supply is cut off, the emergency device starts to work; with overcharge, overdischarge protection and short circuit protection.
- ◆ Designed with test button and sleep button. The test button is for testing. Press the button, lamp shall automatically enter into emergency status. The sleep button is to stop the lamp source output, press this button, the lamp turned off, re-press the button, lamp on and return to work.
- ◆ Ultra-bright LED lamp, low power consumption and long service life up to 50,000 hours; energy saving and environmental protection.
- ◆ Enclosure in copper-free aluminium, powder coated surface, yellow (RAL 1021).
- ◆ Toughened glass sheet resistant to temperature changes.

Catalogue number logic

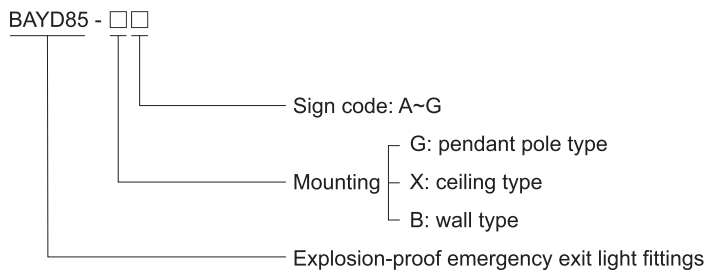

Sign code type A-G

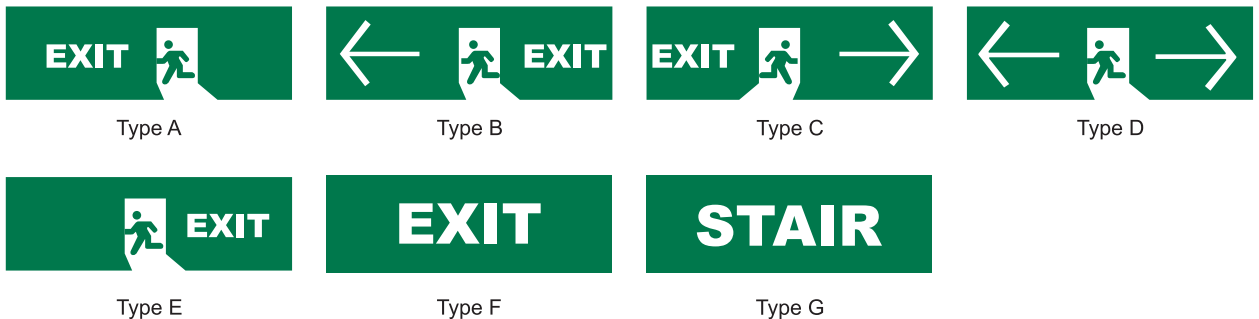

Zones 1&2; 21&22

Local, Caution Spotlight Fittings

BAYD85 Series Explosion-proof Emergency Exit Light Fittings

Technical data

Explosion-proof emergency exit light fittings BAYD85-□□

Explosion protection

Gas explosion protection

⊕ II 2 G Ex d IIB T6 Gb

Dust explosion protection

⊕ II 2 D Ex tb IIIC T80°C Db IP66

Certificates

ATEX and IECEx (applied for)

Conformity to standards

EN 60079-0, EN 60079-1, EN 60079-31

IEC 60079-0, IEC 60079-1, IEC 60079-31

Material

Enclosure

Copper-free aluminium, powder coated surface, yellow(RAL1021)

Exposed fastener

Stainless steel

Rated voltage

100~300V AC 50/60Hz

Lamp

LED lamp (working voltage DC 3.6V)

Power consumption

4W

Emergency time

180min

Battery

Rated capacity

2000mAh

Charging time

24h

Earthing protection

M5 (internal & external earth bolts)

Degree of protection

IP66, IP67 (optional)

Ambient temperature

-20°C~+55°C

Terminal

3 x 1.5~2.5mm² (L+N+PE)

Cable entries

2 x M25 x 1.5 plugs

Cable gland

DQM-II (Ex d) or DQM-III (Ex d) is recommended. Please see P7/20~27.

Weight

5.15kg

Dimension drawings (all dimensions in mm) - subject to alteration

