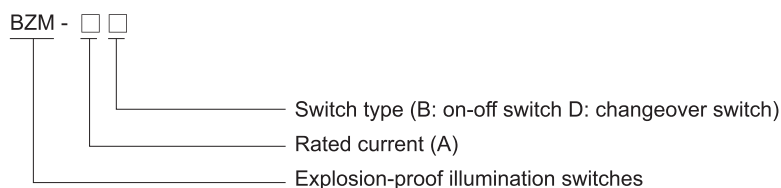


Installation Switches BZM Series Explosion-proof Illumination Switches



- ◆ Explosion protection to
 - CENELEC
 - IEC
 - NEC
- ◆ Can be used in
 - Zone 1 and Zone 2
 - Zone 21 and Zone 22
 - Class I, Zone 1 and Zone 2
 - Class I, Division 1, Groups A, B, C, D
- ◆ Copper-free aluminium enclosure, powder coated surface.
- ◆ Two options:
 - On-off switch
 - Changeover switch

■ Catalogue number logic



Selection table

Type/Ordering code	Chart of contact	Corresponding switch	Weight (kg)																																				
BZM-16B	<table border="1"> <tr> <td></td> <td>0</td> <td>I</td> <td>0</td> <td>I</td> <td></td> </tr> <tr> <td></td> <td>0°</td> <td>90°</td> <td>180°</td> <td>270°</td> <td></td> </tr> <tr> <td>1o</td> <td></td> <td>x</td> <td></td> <td>x</td> <td>o2</td> </tr> <tr> <td>3o</td> <td></td> <td>x</td> <td></td> <td>x</td> <td>o4</td> </tr> <tr> <td>5o</td> <td></td> <td></td> <td>x</td> <td></td> <td>o6</td> </tr> <tr> <td>7o</td> <td></td> <td>x</td> <td></td> <td>x</td> <td>o8</td> </tr> </table>		0	I	0	I			0°	90°	180°	270°		1o		x		x	o2	3o		x		x	o4	5o			x		o6	7o		x		x	o8		0.85
	0	I	0	I																																			
	0°	90°	180°	270°																																			
1o		x		x	o2																																		
3o		x		x	o4																																		
5o			x		o6																																		
7o		x		x	o8																																		
BZM-25B	<table border="1"> <tr> <td></td> <td>0</td> <td>I</td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>0°</td> <td>90°</td> <td></td> <td></td> <td></td> </tr> <tr> <td>1o</td> <td></td> <td>x</td> <td></td> <td></td> <td>o2</td> </tr> <tr> <td>3o</td> <td></td> <td></td> <td>x</td> <td></td> <td>o4</td> </tr> <tr> <td>5o</td> <td></td> <td>x</td> <td></td> <td></td> <td>o6</td> </tr> <tr> <td>7o</td> <td></td> <td></td> <td>x</td> <td></td> <td>o8</td> </tr> </table>		0	I					0°	90°				1o		x			o2	3o			x		o4	5o		x			o6	7o			x		o8		0.95
	0	I																																					
	0°	90°																																					
1o		x			o2																																		
3o			x		o4																																		
5o		x			o6																																		
7o			x		o8																																		
BZM-16D	<table border="1"> <tr> <td></td> <td>0</td> <td>I</td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>0°</td> <td>90°</td> <td></td> <td></td> <td></td> </tr> <tr> <td>1o</td> <td></td> <td>x</td> <td></td> <td></td> <td>o2</td> </tr> <tr> <td>3o</td> <td></td> <td></td> <td>x</td> <td></td> <td>o4</td> </tr> <tr> <td>5o</td> <td></td> <td>x</td> <td></td> <td></td> <td>o6</td> </tr> <tr> <td>7o</td> <td></td> <td></td> <td>x</td> <td></td> <td>o8</td> </tr> </table>		0	I					0°	90°				1o		x			o2	3o			x		o4	5o		x			o6	7o			x		o8		0.85
	0	I																																					
	0°	90°																																					
1o		x			o2																																		
3o			x		o4																																		
5o		x			o6																																		
7o			x		o8																																		
BZM-25D	<table border="1"> <tr> <td></td> <td>0</td> <td>I</td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>0°</td> <td>90°</td> <td></td> <td></td> <td></td> </tr> <tr> <td>1o</td> <td></td> <td>x</td> <td></td> <td></td> <td>o2</td> </tr> <tr> <td>3o</td> <td></td> <td></td> <td>x</td> <td></td> <td>o4</td> </tr> <tr> <td>5o</td> <td></td> <td>x</td> <td></td> <td></td> <td>o6</td> </tr> <tr> <td>7o</td> <td></td> <td></td> <td>x</td> <td></td> <td>o8</td> </tr> </table>		0	I					0°	90°				1o		x			o2	3o			x		o4	5o		x			o6	7o			x		o8		0.95
	0	I																																					
	0°	90°																																					
1o		x			o2																																		
3o			x		o4																																		
5o		x			o6																																		
7o			x		o8																																		

Zones 1&2; 21&22

Installation Switches

BZM Series Explosion-proof Illumination Switches

Technical data

Explosion-proof illumination switches BZM-□□

Explosion protection

Gas explosion protection

⊕ II 2 G Ex d IIC T6 Gb

Dust explosion protection

⊕ II 2 D Ex tb IIIC T80°C Db IP66

Certificates

LCIE 06 ATEX 6068; IECEx LCI 08. 0008; KZ.7500525.22.01.00370 (CU-TR)

Conformity to standards

EN 60079-0, EN 60079-1, EN 60079-31

IEC 60079-0, IEC 60079-1, IEC 60079-31

Enclosure material

Copper-free aluminium, powder coated surface

Enclosure colour

Window grey (RAL7040)

Switch function

On-off switch or changeover switch

Exposed fastener

Stainless steel

Rated voltage

Max. 250V AC

Rated current

16A, 25A

Degree of protection

IP66

Ambient temperature

-60°C~+60°C

Cable connection

3 x (2.5~4)mm²

Cable entries





Standard 2 x M25 x 1.5 plugs

2 x G3/4" plugs or 2 x NPT3/4" plugs on request

Cable gland(optional)

DQM-II (Ex d) or DQM-III (Ex d) is recommended. Please see P7/20~27.

Spare parts

Built-in switch	Rated voltage/current	Ordering code	Weight (kg)
 	250V/16A	30001	0.10
	250V/25A	30002	0.20
 	250V/16A	30003	0.10
	250V/25A	30004	0.20

Dimension drawings (all dimensions in mm) - subject to alteration

