

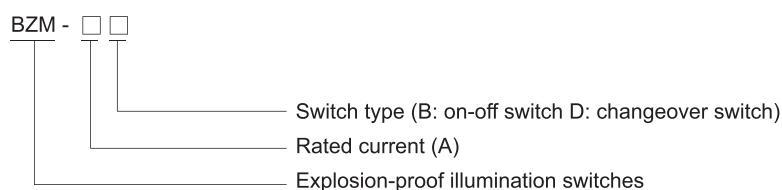
Installation Switches

BZM Series Explosion-proof Illumination Switches





- ◆ Explosion protection to
 - CENELEC
 - IEC
 - NEC
- ◆ Can be used in
 - Zone 1 and Zone 2
 - Zone 21 and Zone 22
 - Class I, Zone 1 and Zone 2
 - Class I, Division 1, Groups A, B, C, D
- ◆ Copper-free aluminium enclosure, powder coated surface.
- ◆ Two options:
 - On-off switch
 - Changeover switch

Catalogue number logic



Selection table

Type/Ordering code	Chart of contact	Corresponding switch	Weight (kg)																																		
BZM-16B	<table><tr><td></td><td>0</td><td>I</td><td>0</td><td>I</td></tr><tr><td></td><td>0°</td><td>90°</td><td>180°</td><td>270°</td></tr><tr><td>1—</td><td></td><td>x</td><td></td><td>x</td><td>—2</td></tr><tr><td>3—</td><td></td><td>x</td><td></td><td>x</td><td>—4</td></tr><tr><td>5—</td><td></td><td>x</td><td></td><td>x</td><td>—6</td></tr><tr><td>7—</td><td></td><td>x</td><td></td><td>x</td><td>—8</td></tr></table>		0	I	0	I		0°	90°	180°	270°	1—		x		x	—2	3—		x		x	—4	5—		x		x	—6	7—		x		x	—8		0.85
	0	I	0	I																																	
	0°	90°	180°	270°																																	
1—		x		x	—2																																
3—		x		x	—4																																
5—		x		x	—6																																
7—		x		x	—8																																
BZM-25B			0.95																																		
BZM-16D	<table><tr><td></td><td>0</td><td>I</td></tr><tr><td></td><td>0°</td><td>90°</td></tr><tr><td>1—</td><td></td><td>x</td><td>—2</td></tr><tr><td></td><td></td><td></td><td>x</td><td>—4</td></tr><tr><td>3—</td><td></td><td>x</td><td>—6</td></tr><tr><td></td><td></td><td></td><td>x</td><td>—8</td></tr></table>		0	I		0°	90°	1—		x	—2				x	—4	3—		x	—6				x	—8		0.85										
	0	I																																			
	0°	90°																																			
1—		x	—2																																		
			x	—4																																	
3—		x	—6																																		
			x	—8																																	
BZM-25D			0.95																																		

Zones 1&2; 21&22

Installation Switches

BZM Series Explosion-proof Illumination Switches

Technical data

Explosion-proof illumination switches BZM-□□

Explosion protection

Gas explosion protection

Ex II 2 G Ex d IIC T6 Gb

Dust explosion protection

Ex II 2 D Ex tb IIIC T80°C Db IP66

Certificates

LCIE 06 ATEX 6068; IECEx LCI 08. 0008

Conformity to standards

EN 60079-0:2012, EN 60079-1:2007, EN 60079-31:2009

IEC 60079-0:2011, IEC 60079-1:2007, IEC 60079-31:2008

Enclosure material

Copper-free aluminium, powder coated surface

Enclosure colour

Window grey (RAL7040)

Switch function

On-off switch or changeover switch

Exposed fastener

Stainless steel

Rated voltage

Max. 250V AC

Rated current

16A, 25A

Degree of protection

IP66, IP67 (optional)

Ambient temperature

-60°C~+60°C

Cable connection

3 x (2.5~4)mm²

Cable entries

Standard 2 x M25 x 1.5 plugs

2 x G3/4" plugs or 2 x NPT3/4" plugs on request

Cable gland(optional)

DQM-II (Ex d) or DQM-III (Ex d) is recommended. Please see P7/20~27.

Spare parts

Built-in switch	Rated voltage/current	Ordering code	Weight (kg)
	250V/16A	30001	0.10
	250V/25A	30002	0.20
	250V/16A	30003	0.10
	250V/25A	30004	0.20

Dimension drawings (all dimensions in mm) - subject to alteration

