


Control Unit Systems

BZA85 Series Explosion-proof Control Unit Systems



- ◆ Explosion protection to
 - CENELEC
 - IEC
 - NEC
- ◆ Can be used in
 - Zone 1 and Zone 2
 - Zone 21 and Zone 22
 - Class I, Zone 1 and Zone 2
 - Class I, Division 1, Groups A, B, C, D
- ◆ Copper-free aluminium, powder coated surface.

■ Catalogue number logic

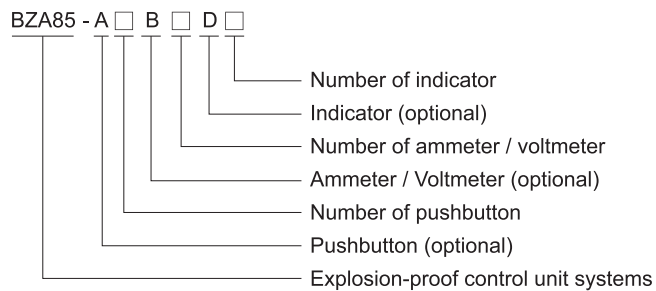















■ Note

1. Please refer to the Selection table on P4/25.
2. Please select internal components as below:
 - Selection table of HA pushbutton on P4/12~13 (nominal contact is 1NO+1NC);
 - Selection table of HD indicator on P4/14~15;
 - Dimension drawings of ammeter (type 48) and voltmeter (type 48) see P4/27.
3. Example: BZA85-A1
 - Components: One control button
 - Tech. Details: One start control button (40036B + 40033, green, 1NO+1NC)
4. Special requirements on request.

Zones 1&2; 21&22

Control Unit Systems BZA85 Series Explosion-proof Control Unit Systems







Technical data				
Explosion-proof control unit systems BZA85				
Explosion protection	Gas explosion protection Ex II 2 G Ex d IIC T6 Gb Dust explosion protection Ex II 2 D Ex tb IIIC T80°C Db IP66 / IP67			
Certificates	ATEX and IECEx (applied for); CU-TR			
Conformity to standards	EN 60079-0, EN 60079-1, EN 60079-31 IEC 60079-0, IEC 60079-1, IEC60079-31			
Enclosure material	Copper-free aluminium, powder coated surface			
Enclosure colour	Window grey (RAL7040)			
Exposed fastener	Stainless steel			
Rated voltage	Max.500V AC			
Rated current	10A			
Degree of protection	IP66, IP67(optional)			
Ambient temperature	-60°C ~+60°C			
Components	HA pushbutton Technical data on P4/12~13 HD indicator Technical data on P4/14~15 Ammeter (type 48) / Voltmeter (type 48)			
		Working mode	Accuracy	Overload times
	Ammeter	Electromagnetic type (moving iron)	Class 1.5	5 times (2 or 6 times on request)
	Voltmeter			
Cable entries	Standard 2 x M25 x 1.5 plugs 2 x G3/4" plugs or 2 x NPT3/4" plugs on request			
Cable gland (optional)	DQM-II (Ex d) or DQM-III (Ex d) is recommended. Please see P7/20~27.			

Selection table (Pushbutton / Indicator)				
Outline	Colour	Chart of contact	Ordering code	Weight (kg)
Indicator 	Red 		40171A	0.65
	Green 		40171B	
Spring-return button 	Red 		40172A	0.65
	Green 		40172B	
Mushroom stay-put emergency pushbutton 	Red 		40173	0.7
Mushroom turn-to-release emergency pushbutton 	Red 		40174	0.7




Control Unit Systems BZA85 Series Explosion-proof Control Unit Systems

Selection table (Pushbutton)


Outline	Chart of contact	Ordering code	Weight (kg)
Key-operated pushbutton 		40175A	0.7
		40175B	0.7
Rotary button 		40176A	0.7
		40176B	0.7

Selection table (Ammeter)

Version	Description	Overload scale	Measuring range	Ordering code	Weight (kg)
	Direct measuring	2 times	0~20/40 mA	40177	0.70
			4~20/40 mA	40178	
	Direct measuring	2 times	0~1 A	40179	
			0~5 A	40180	
	For CT (current transformer)	2 times or 6 times	sek. 1 A	40181	
			sek. 5 A	40182	




Selection table (Voltmeter)



Version	Description	Measuring range	Ordering code	Weight (kg)
	Direct measuring	0~10 V	40183	0.70
		0~25 V	40184	
		0~40 V	40185	
		0~60 V	40186	
		0~100 V	40187	
		0~150 V	40188	
		0~250 V	40189	
		0~300 V	40190	
		0~450 V	40191	
		0~500 V	40192	
	For PT (potential transformer)	sek. 100 V	40193	
		sek. 110 V	40194	
		sek. 120 V	40195	

Control Unit Systems
BZA85 Series Explosion-proof Control Unit Systems



Dimension drawings (all dimensions in mm) - subject to alteration





Indicator





Spring-return button





Mushroom turn-to-release emergency pushbutton





Mushroom stay-put emergency pushbutton






Key-operated pushbutton



Rotary button



Ammeter / Voltmeter



Ammeter (48 type) / Voltmeter (48 type)

