

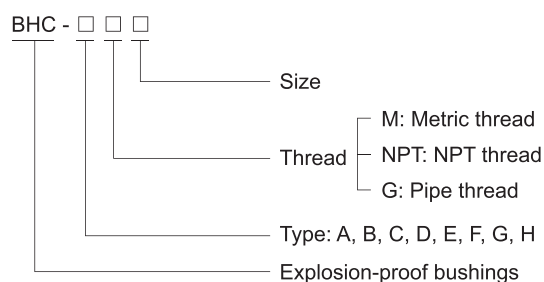
Accessories for Installation

BHC Series Explosion-proof Aluminium Alloy Bushings



- ◆ Explosion protection to
 - CENELEC
 - IEC
 - NEC
- ◆ Can be used in
 - Zone 1 and Zone 2
 - Zone 21 and Zone 22
 - Class I, Zone 1 and Zone 2
 - Class I, Division 2, Groups A, B, C, D
- ◆ Ex e enclosure, copper-free aluminium, powder coated surface.
- ◆ Widely used for connection in steel pipe wiring system.

Catalogue number logic



Technical data

Explosion-proof aluminium alloy bushings BHC-□□□

Explosion protection	
Gas explosion protection	Ex II 2 G Ex e IIC Gb
Dust explosion protection	Ex II 2 D Ex tb IIIC Db IP66
Certificates	LCIE 06 ATEX 6017; IECEX LCI 08.0004; RU C-CN.ГБ08.B.00610(CU-TR)
Conformity to standards	EN 60079-0:2012, EN 60079-7:2007, EN 60079-31:2009 IEC 60079-0:2011, IEC 60079-7:2006, IEC 60079-31:2008
Enclosure material	Copper-free aluminium, powder coated surface.
Enclosure colour	Window grey (RAL7040)
Degree of protection	IP66
Ambient temperature	-60°C~+100°C
Type	A, B, C, D, E, F, G, H
Connection thread	Metric thread is standard type; G thread or NPT thread is optional.


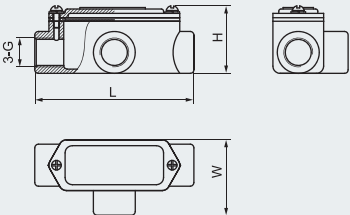
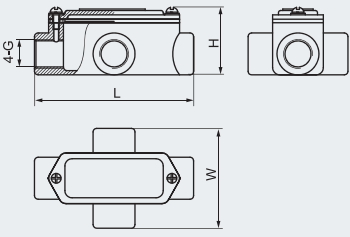

Note: M75, M90, M110 equivalent G thread and NPT thread can be customized.

Zones 1&2; 21&22

Accessories for Installation

BHC Series Explosion-proof Aluminium Alloy Bushings

Selection table

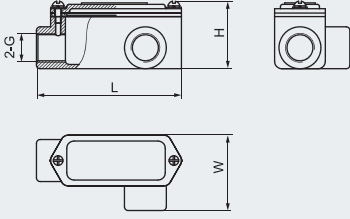



Version	Female thread			Dimensions (mm)			Ordering code	Weight (kg)
	G			W	H	L		
 Type A	M20 x 1.5	NPT 1/2"	G1/2"	35	45	110	701001	0.15
	M25 x 1.5	NPT 3/4"	G3/4"	38	49	118	701002	0.20
	M32 x 1.5	NPT 1"	G1"	45	54	145	701003	0.35
	M40 x 1.5	NPT 1 1/4"	G1 1/4"	54	65	170	701004	0.50
	M50 x 1.5	NPT 1 1/2"	G1 1/2"	60	71	176	701005	0.60
	M63 x 1.5	NPT 2"	G2"	72	83	204	701006	0.65
 Type B	M20 x 1.5	NPT 1/2"	G1/2"	52	45	110	701007	0.20
	M25 x 1.5	NPT 3/4"	G3/4"	55	49	118	701008	0.20
	M32 x 1.5	NPT 1"	G1"	63.5	54	145	701009	0.35
	M40 x 1.5	NPT 1 1/4"	G1 1/4"	71	65	170	701010	0.50
	M50 x 1.5	NPT 1 1/2"	G1 1/2"	80	71	176	701011	0.65
	M63 x 1.5	NPT 2"	G2"	93.5	83	204	701012	1.20
 Type C	M20 x 1.5	NPT 1/2"	G1/2"	69	45	110	701013	0.20
	M25 x 1.5	NPT 3/4"	G3/4"	72	49	118	701014	0.25
	M32 x 1.5	NPT 1"	G1"	80	54	145	701015	0.40
	M40 x 1.5	NPT 1 1/4"	G1 1/4"	88	65	170	701016	0.55
	M50 x 1.5	NPT 1 1/2"	G1 1/2"	100	71	176	701017	0.65
	M63 x 1.5	NPT 2"	G2"	115	83	204	701018	1.20
 Type D	M20 x 1.5	NPT 1/2"	G1/2"	52	45	101	701019	0.20
	M25 x 1.5	NPT 3/4"	G3/4"	55	49	108	701020	0.20
	M32 x 1.5	NPT 1"	G1"	63	54	135	701021	0.35
	M40 x 1.5	NPT 1 1/4"	G1 1/4"	71	65	162.5	701022	0.50
	M50 x 1.5	NPT 1 1/2"	G1 1/2"	80	71	165.5	701023	0.60
	M63 x 1.5	NPT 2"	G2"	93.5	83	194.5	701024	1.20



Accessories for Installation

BHC Series Explosion-proof Aluminium Alloy Bushings

Selection table

Version	Female thread			Dimensions (mm)			Ordering code	Weight (kg)
	G			W	H	L		
 Type E	M20 x 1.5	NPT 1/2"	G1/2"	52	45	101	701025	0.20
	M25 x 1.5	NPT 3/4"	G3/4"	55	49	108	701026	0.20
	M32 x 1.5	NPT 1"	G1"	63	54	135	701027	0.35
	M40 x 1.5	NPT 1 1/4"	G1 1/4"	71	65	162.5	701028	0.50
	M50 x 1.5	NPT 1 1/2"	G1 1/2"	80	71	165.5	701029	0.60
	M63 x 1.5	NPT 2"	G2"	93.5	83	194.5	701030	1.20
 Type F	M20 x 1.5	NPT 1/2"	G1/2"	35	62	101	701031	0.20
	M25 x 1.5	NPT 3/4"	G3/4"	38	66	108	701032	0.20
	M32 x 1.5	NPT 1"	G1"	46	71	135	701033	0.50
	M40 x 1.5	NPT 1 1/4"	G1 1/4"	54	82	162.5	701034	0.50
	M50 x 1.5	NPT 1 1/2"	G1 1/2"	60	91	165.5	701035	0.60
	M63 x 1.5	NPT 2"	G2"	72	104	194.5	701036	1.15
 Type G	M20 x 1.5	NPT 1/2"	G1/2"	35	62	110	701037	0.20
	M25 x 1.5	NPT 3/4"	G3/4"	38	66	118	701038	0.20
	M32 x 1.5	NPT 1"	G1"	46	71	145	701039	0.35
	M40 x 1.5	NPT 1 1/4"	G1 1/4"	54	82	170	701040	0.50
	M50 x 1.5	NPT 1 1/2"	G1 1/2"	60	91	176	701041	0.60
	M63 x 1.5	NPT 2"	G2"	72	104	204	701042	1.20
 Type H	M20 x 1.5	NPT 1/2"	G1/2"	30	51	84	701043	0.10
	M25 x 1.5	NPT 3/4"	G3/4"	35	53	89	701044	0.15
	M32 x 1.5	NPT 1"	G1"	41	64	108	701045	0.25
	M40 x 1.5	NPT 1 1/4"	G1 1/4"	51	69	116	701046	0.25
	M50 x 1.5	NPT 1 1/2"	G1 1/2"	57	76	130	701047	0.35
	M63 x 1.5	NPT 2"	G2"	70	95	168	701048	0.55