

Control Stations


FZC-G Series Weatherproof Control Stations (Stainless Steel)



- ◆ Stainless steel enclosure.
- ◆ Exposed fastener: Stainless steel.
- ◆ Suitable to be used in the control circuit of voltage 415V or less, AC 50Hz, current less than 10A.
- ◆ Inner components brand shall be recommended by us, the components mainly include button, meter, indicator, and control switch etc..



Catalogue number logic

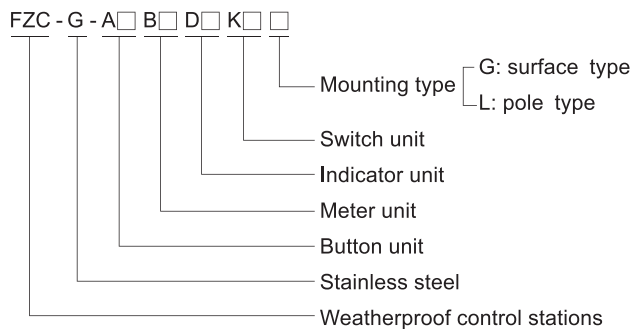

Note

1. Please select internal components as below:
 - A pushbutton Selection table on P9/24 (Nominal contact is 1NO+1NC);
 - D indicator Selection table on P9/24
 - B ammeter/voltmeter Selection table on P9/25
 - K control switch Selection table on P9/26
2. Example: FZC-G-A2B1K1L
 - Components: Two pushbuttons, one ammeter, one control switch; pole type
 - Tech. Details: One start pushbutton (a2 + III, green, 1NO+1NC);
 - One stop pushbutton (a1 + III, red, 1NO+1NC);
 - One ammeter (100/5A);
 - One control switch (Function A, stop-run-start);
3. Special requirements on request.

Control Stations


FZC-G Series Weatherproof Control Stations (Stainless Steel)

Technical data

Rated voltage	Max.415V AC
Rated current	10A
Degree of protection	IP65
Usage type	AC-15, DC-13
Thread for inlet and outlet	G1" (please specify the special requirements (if any))
Available cable outer diameter	Φ 18~Φ 25(mm)
Mounting type	Surface type, Pole type

Dimension drawings (all dimensions in mm) - subject to alteration

Surface type

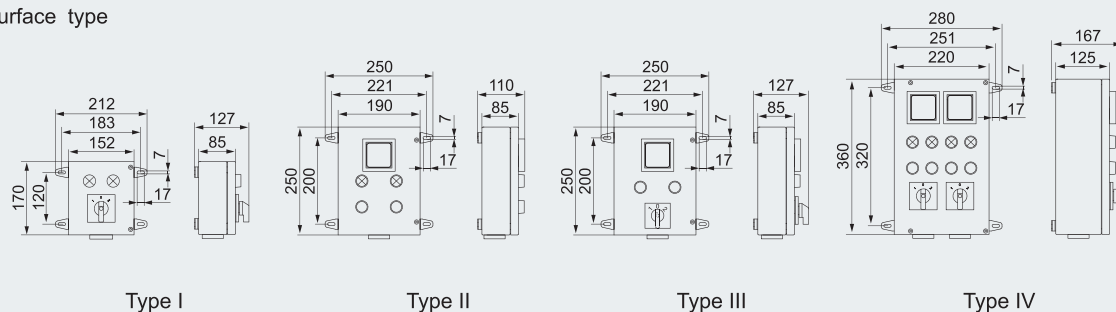

Pole type

