




- ◆ The product is made of glass fibre reinforced unsaturated polyester resin, compression molding, with beautiful appearance. Anti-aging, deformation-free, impact resistance corrosion-proof performance etc..
- ◆ Stainless steel exposed fastener, silicone rubber seals, anti-oil, anti-acid, anti-alkali, and high temperature resistance.
- ◆ These series of products are anti-strong acid, anti- strong alkali anti-salt, water and chloride ion corrosion resistance.



■ Catalogue number logic

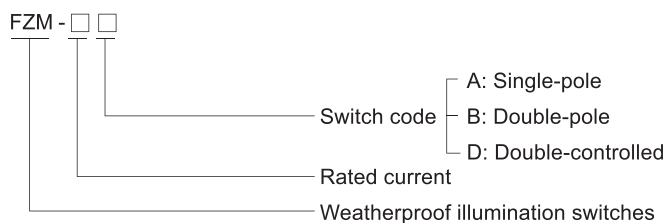



Installation Switches

FZM Series Weatherproof Illumination Switches


Technical data

Rated voltage	Max. 250V AC
Rated current	10A
Degree of protection	IP65
Thread for inlet and outlet	G3/4"
Available cable outer diameter	Φ 13~Φ 18(mm)

Selection table

Type/specification	FZM-10A	FZM-10B	FZM-10D
Combination type of contact			
Switch code	Single-pole	Double-pole	Double-controlled

Dimension drawings (all dimensions in mm) - subject to alteration

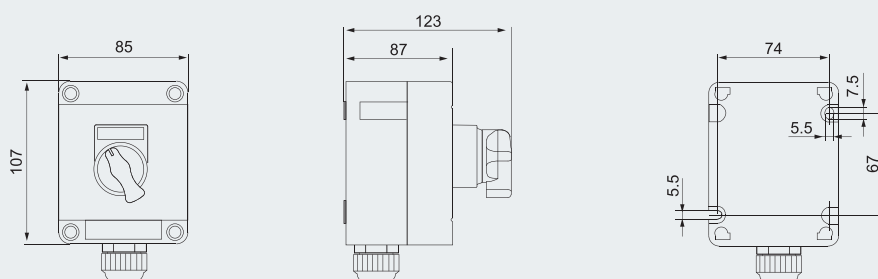

Note

- 1.Specify the complete type and specifications; built-in an ON-OFF contact switch.
- 2.Cable wiring (please specify if steel pipe wiring required).